



Applications

WDSL slotted wall wiring duct features break-away fingers which provide additional access for wire leads. Each section of the duct is provided with two score lines. The upper score line is used to break away fingers when a wider opening is required. The lower score line allows the sidewall to be smoothly cut for joints and “T’s”

Features and Benefits


- Strong fingers prevent unwanted breaking.
- Fingers are easily deflected outward, allowing ready positioning of the wires within the slotted wall duct.
- Restricted opening prevents unintended removal of wires and permits any individual wire to be traced without disconnection
- Smooth Edges
- Cover is Flush with Side of Duct
- Non-Slip Cover

Properties

Material	Polyvinylchloride (PVC)
Flammability	Self-extinguishing
Operating Temperature	+122°F (+50°C)

WDSL

Dimensions

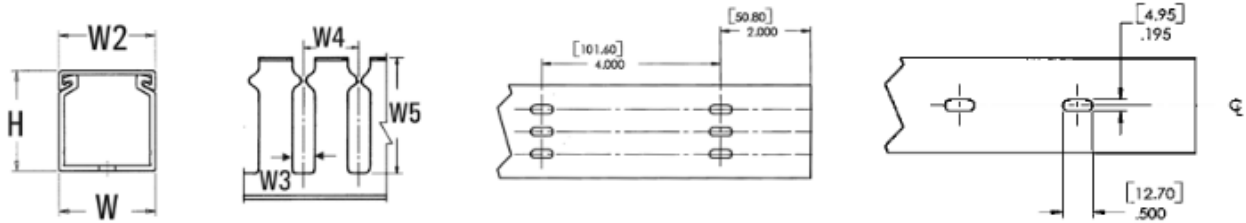

DX P/N	Width (W)		Height (H)		Width (W2)		Width (W3)		Width (W4)		Width (W5)	
	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)
WDSL 1X1	1.0	25.4	1.06	26.9	1.0	25.4	0.4	10.2	1.0	25.4	0.75	19.1
WDSL 1X1.5	1.0	25.4	1.57	39.9	1.0	25.4	0.4	10.2	1.0	25.4	1.19	30.2
WDSL 1X2	1.0	25.4	2.07	52.6	1.0	25.4	0.4	10.2	1.0	25.4	1.62	41.1
WDSL 1X3	1.0	25.4	3.07	77.9	1.0	25.4	0.4	10.2	1.0	25.4	2.60	66.0
WDSL 1X4	1.0	25.4	4.07	103.4	1.0	25.4	0.4	10.2	1.0	25.4	3.60	91.4
WDSL 1.5X1	1.5	38.1	1.06	26.9	1.5	38.1	0.4	10.2	1.0	25.4	0.75	19.1
WDSL 1.5X1.5	1.5	38.1	1.57	39.9	1.5	38.1	0.4	10.2	1.0	25.4	1.20	30.5
WDSL 1.5X2	1.5	38.1	2.07	52.6	1.5	38.1	0.4	10.2	1.0	25.4	1.60	40.6
WDSL 1.5X3	1.5	38.1	3.07	77.9	1.5	38.1	0.4	10.2	1.0	25.4	2.60	66.0
WDSL 1.5X4	1.5	38.1	4.07	103.4	1.5	38.1	0.4	10.2	1.0	25.4	3.60	91.4
WDSL 2X1	2.0	50.8	1.06	26.9	2.0	50.8	0.4	10.2	1.0	25.4	0.75	19.1
WDSL 2X2	2.0	50.8	2.07	52.6	2.0	50.8	0.4	10.2	1.0	25.4	1.60	40.6
WDSL 2X3	2.0	50.8	3.07	77.9	2.0	50.8	0.4	10.2	1.0	25.4	2.60	66.0
WDSL 2X4	2.0	50.8	4.07	103.4	2.0	50.8	0.4	10.2	1.0	25.4	3.60	91.4
WDSL 2X5	2.0	50.8	5.07	128.8	2.0	50.8	0.4	10.2	1.0	25.4	4.60	116.8
WDSL 3X1	3.0	76.2	1.06	26.9	3.0	76.2	0.4	10.2	1.0	25.4	0.75	19.1
WDSL 3X2	3.0	76.2	2.07	52.6	3.0	76.2	0.4	10.2	1.0	25.4	1.62	41.1
WDSL 3X3	3.0	76.2	3.07	77.9	3.0	76.2	0.4	10.2	1.0	25.4	2.60	66.0
WDSL 3X4	3.0	76.2	4.07	103.4	3.0	76.2	0.4	10.2	1.0	25.4	3.60	91.4
WDSL 3X5	3.0	76.2	5.06	128.5	3.0	76.2	0.4	10.2	1.0	25.4	4.60	116.8
WDSL 4X2	4.0	101.6	2.07	52.6	4.0	101.6	0.4	10.2	1.0	25.4	1.62	41.1
WDSL 4X3	4.0	101.6	3.07	77.9	4.0	101.6	0.4	10.2	1.0	25.4	2.60	66.0
WDSL 4X4	4.0	101.6	4.07	103.4	4.0	101.6	0.4	10.2	1.0	25.4	3.60	91.4
WDSL 4X5	4.0	101.6	5.07	128.8	4.0	101.6	0.4	10.2	1.0	25.4	4.60	116.8

Standard Color: White and Gray (Black on special request)